

# CELLO V-S

SYMPHONY SERIES ®

LAMINATED ENGINEERED BAMBOO  
GROOVED CLADDING PANEL

PRODUCT DATA SHEET

house of  
bamboo

EST. 1972

# WHY SPECIFYING MATTERS

## CHOOSING SUSTAINABILITY WITH CONFIDENCE




When you specify materials for your projects, it's not just about meeting technical requirements—it's about making a statement on sustainability. At House of Bamboo®, each of our products is more than just a building material; it's a commitment to ethical and environmentally responsible construction. Our engineered bamboo products come with a suite of certifications that assure you of their quality and sustainability:

- Global GreenTag Certified - Level A and Health Rate - Platinum, equating on a global scale to standards such as WELL, Green Star, LEED, IWBI, and the IS Rating Tool. This indicates the highest levels of environmental and health performance, underscoring the global relevance and rigour of our certifications.
- FSC Certification to guarantee that the bamboo is sourced from responsibly managed forests.

When specifying our materials, you must include these environmental credentials to ensure the quality of product for your clients. Additionally, by choosing House of Bamboo®, you are opting for carbon negative products, which significantly reduce greenhouse gas emissions, further cementing your project's role in combating climate change.

House of Bamboo® is accredited by third parties, ensuring specifiers that the materials they choose are genuine. Selecting House of Bamboo® means choosing eco-friendly products of superior quality and integrity. Not all engineered bamboo products are alike; insist on the best—insist on House of Bamboo®.



# CELLO V-S

## PRODUCT DATA SHEET

### CLASSIFICATION

Series	Symphony Series ®
Model	Cello V-S
Description	Laminated Engineered Bamboo grooved cladding panel. Shiplap Joint.

### PHYSICAL PROPERTIES

STYLE	LAMINATED VERTICAL GRAIN
Finishes For more information on stains available, go to "Finishes Available" Page 03.	Raw
Dimensions Length [L] x Width [W] x Depth [D]	2900mm [L] x 140mm [W] x 18mm [D] 5800mm [L] x 140mm [W] x 18mm [D]
Bevel	3mm Inner Radius Bevel and Outer Bevel Radius.

### PACKAGING PROPERTIES

Length [L] x Width [W] x Depth [D]	2920mm [L] x 150mm [W] x 100 mm [D] 5820mm [L] x 150mm [W] x 100 mm [D]
Quantity Per Pack	5 Pieces Per Box
Weight & Size Per Pack Length [L] x Width [W] x Depth [D] = Weight [kg]	2920mm [L] x 150mm [W] x 100mm [D] = 22kg 5820mm [L] x 150mm [W] x 100mm [D] = 42kg
Weight Per Piece	2900mm = 4kg 5800mm = 8kg


### SKU BREAKDOWN

Type	Series	Model	Width	Height	Colour	SKU
CLADD = Cladding	SYMP = Symphony	Cello 5S	135 mm	2900mm 5800mm	R = Raw	CLAD-SYMP-CELLO-5S- W135-H2900-R

### SKU LIST

CLAD-SYMP-CELLO-5S-W135-H2900-R	CLAD-SYMP-CELLO-5S-W135-H5800-R
---------------------------------	---------------------------------

### PROFILE

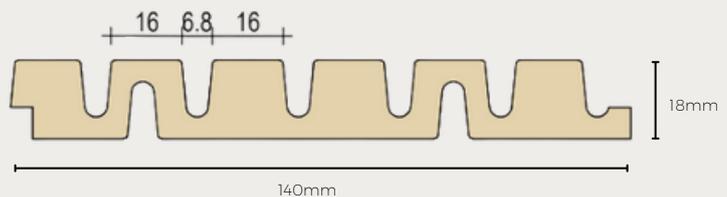

Note: Profile drawing are indicative and not to scale.

## PRODUCT TECHNICAL SPECIFICATION AND TOLERANCE

PROPERTIES	STANDARD
Indoor Emissions	Class E1 [ $<0.124 \text{ mg/m}^3$ ] [EN 717-1]
Hardness [Brinell]	$> 4 \text{ kg/mm}^2$ [EN 1534]
Durability	Class 1 (EN 350 / CEN/TS 15083-2)
Fire Rating	Group 3 [AS ISO 9705:2003] : B grade Bfl-s1 (EN 13501-1)
BAL Rating	N/A
Density of Material $\text{kg/m}^3$	$680 \text{ kg/m}^3$
Tolerance	Length: $\pm 0.5 \text{ mm}$ per m Width: $\pm 0.5 \text{ mm}$ per m Thickness: $\pm 0.5 \text{ mm}$ per m
Moisture Content	9% - 13%
H3 Treatment [For External Applications]	As per Australian Standards 1604

## CERTIFICATIONS

Global GreenTag Standards	GreenRate Level A HealthRate Platinum
International Living Future Institute	Declare Label LBC Red List Approved Material 1-10 Interior Performance: CDPH Standard Method v1.2-2017 1-14 Responsible Sourcing: Product Available with FSC Chain of Custody; Low Risk Wood
FSC	Certified [Available on Request]
Rating Tools	Green Star - AU- GBCA IS Rating - ISCA USGBC LEED V4.0 and v4.1 Rating Tool Credit WELL Features - IWBI
Fire Rating Level	Class 3 (Refer to National Construction Code.)

## HOB GREENTAG CERTIFICATION

Green Building, Interiors & Infrastructure Sustainability Rating Tools	Recognized in Product & Materials Credits and WELL Features	Global GreenTag International Certifications & Declarations			
		GreenRATE Level A	LCARATE	Product Health Declaration	Environmental Product Declaration
WELL, Green Star	VOC, IAC	✓		✓	
LEED	USGBC	✓			
WELL - IWBI	EPDs			✓	
IS Rating Tool	Sustainable Product Ecolabel Certification	✓	✓	✓	✓

## MATERIAL SPECIFICATION

Composition LBC Declare Label Red List Approved Material	99% Phyllostachys Edulis Bamboo Fibre 1% Resin
Material Identification	Scientific Classification: Family Poaceae, Genus Phyllostachys, Species P. edulis.
Treatments for External Application	Mould proof treated-H3 [External] as per Australian Standards AS 1604
Recommended Use	Screens, Cladding, Fencing Joinery
Hazard Identification	Not classified as Hazardous according to the Globally Harmonised System of Classification and labeling of Chemicals (GHS), including Work, Health and Safety Regulations, Australia. Not classified as Dangerous Goods according to the Australian Code for the Transport of Dangerous Goods by Road and Rail.

\*The lifespan of wood, bamboo and other natural materials can be compared by means of a classification according to the European standard EN 350. In the wood industry the classification is common knowledge:  
 Durability Class 1 = very durable, expected life span 25 years or more // Durability Class 2 = durable, expected life span 15-25 years // Durability Class 3 = moderately durable, expected life span 10-15 years // Durability Class 4 = little durable, expected life span 5-10 years // Durability Class 5 = not durable, expected life span 5 years or less

## ACCESSORIES

Bamboo Capping Square 	Finish	Length [L] x Width [W] x Height [H]	SKU
	Raw	5800mm [L] x 38mm [W] x 48mm [H]	CAPP-VERT-SQUARE-38-W48-H5800-R
		5800mm [L] x 40mm [W] x 70mm [H]	CAPP-VERT-SQUARE-40-W70-H5800-R
Teak	5800mm [L] x 38mm [W] x 48mm [H]	CAPP-VERT-SQUARE-38-W38-H5800-T	
	5800mm [L] x 40mm [W] x 70mm [H]	CAPP-VERT-SQUARE-40-W70-H5800-T	

## FINISHES AVAILABLE - CUSTOM ORDERS

WOCA Denmark® water-based Oil <a href="https://wocadenmark.com/">[https://wocadenmark.com/]</a>	Colours Available: Natural, Teak, Black, Grey, Walnut, Bangkirai, Larch, Antracite, White, Hazelnut, Merbau, Stone Grey, Thunder Grey.
Vernites® water-based finish with tintometric system based on 26 colour options, that can be modified to get different intensity and gloss levels. <a href="https://www.vernitesaustralia.com.au/">[https://www.vernitesaustralia.com.au/]</a>	Colours Available: Pino, Noce, Hemlock, Teak, Castagno, Noce Rossiccio, Mogano, Larice, Noce Chiaro, Douglas, Noce Acerba, Noce CR, Noce Scuro, Verde Scuro.
Application of Finishes	Please check supplier Product Data Sheet and Safety Data sheets prior to application.
Measurements	Please contact our Sales Team to discuss the available options.

\*Please contact our Sales Team to discuss order as cost may differ from standard products.

# PRODUCT HEALTH DECLARATION AND HEALTHRATE CERTIFICATION

---

House of Bamboo's Engineered Laminated bamboo products are made with rapidly renewable materials. The products are tested against AS/NZ 3837. House of Bamboo's Engineered Laminated bamboo products are resistant to termites and require minimal maintenance when installed internally.

## HANDLING & STORAGE


---

Precautions for Safe Handling	Material should be stored in a cool dry area. Exposure to moisture may cause mould or mildew to form on the surface of the material.
Minimise Handling	To reduce potential damage to materials, minimize handling and utilize team lifting procedures.
Proper Stacking	Materials should be stored flat on raised blocking of equal thickness and spacing. Recommended spacing for spacers is every 30 to 60 cm.
Light	Avoid long exposure to direct sunlight for unfinished materials.
Acclimation	Materials should be allowed to acclimate to the installation environment and humidity prior to installation. Recommended acclimation time is 48 to 72 hours.

---

## COLOUR CHART

---

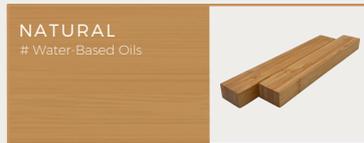

## STATEMENT OF RESPONSIBILITY

---

This publication's technical information and application suggestions are based on the best of our current knowledge. Since the material provided here is general in nature, no guarantee of correctness, dependability, or completeness—either expressed or implied—is offered, save as required by Commonwealth or State law. Moreover, no assumption can be made regarding a product's suitability for a given use or application. The responsibility of verifying that products are appropriate for the purposes for which they are intended falls on the owner, his agent, or the contractor.

## TALK TO US ABOUT THE BAMBOO YOU NEVER KNEW

---

Phone: Local or Interstate: 1300 665 703  
International: (+61)2 9666 5703

---

For General Enquiries [info@houseofbamboo.com.au](mailto:info@houseofbamboo.com.au)

---

For any Upcoming Projects [projects@houseofbamboo.com.au](mailto:projects@houseofbamboo.com.au)

---

Address 13 Erith Street, Botany NSW 2019

---

Opening Hours Monday to Friday: 8:00am - 4:00pm  
Saturday: 9:00am - 1:00pm  
Sunday: Closed

---

Website [www.houseofbamboo.com.au](http://www.houseofbamboo.com.au)

---

Follow Us on Instagram [@house.of.bamboo.australia](https://www.instagram.com/house.of.bamboo.australia)

---



house of  
bamboo  
EST. 1972